




AIR ZONE INDUSTRIES, INC.

**SERIES: LP, MP, HP
SONATROL
SILENCERS**

SUBMITTAL DATA

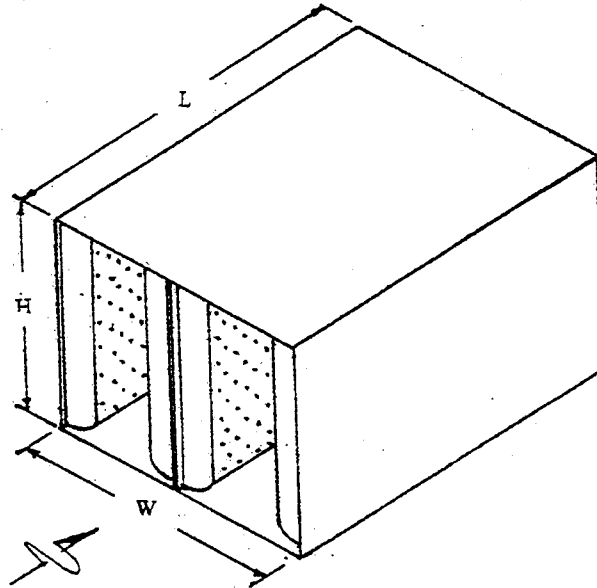

SPECIFICATIONS

Outer casing is constructed of 22 gauge galvanized steel. All external seams are lockformed and filled with a suitable joint compound and are air tight up to 8.0" water gauge pressure differential. Stiffeners prevent audible vibration during normal operation of air systems.

Interior partitions are minimum 22 gauge galvanized steel perforated to remove no more than 15% of the area. Inorganic fiberglass acoustically absorptive filler material is compressed a minimum of 5% to eliminate voids and prevent settling and is vermin proof, moisture proof and odorless.

Incombustible filler material does not exceed the following fire hazard classification values when used in accordance with standard ASTM E84 or UL 723 test methods:

Flamespread 25 Fuel Contributed 0 Smoke Developed 50

TAG	QTY	W	H	L	REMARKS

Options: Standard galvanized finish Special coating High temperature sealant
 Field assembled multiple modules Factory assembly multiple modules